

Cambridgeshire County Council
Cambridge Road, Shepreth and Cambridge Road, Melbourn
(Temporary 40mph Speed Limit)
Order 2026-21763

NOTICE is given that Cambridgeshire County Council intends to make an Order pursuant to the Road Traffic Regulation Act 1984, as amended by the Road Traffic (Temporary Restrictions) Act 1991, the effect of which is to impose a 40mph speed limit along Cambridge Road, Shepreth and Cambridge Road, Melbourn as lies between Wrights Mower Centre and Fowlmere Road.

The Order will be effective, for safety purposes, when signs are in place indicating the speed limit along the whole or any part of the above mentioned length of road whilst works are in progress or temporarily suspended.


The proposed Order is necessary to facilitate telecommunications pole replacement and associated works which are being carried out on or near this highway.

It is anticipated that these works will take place between 9 November and 10 November 2026, when the restriction is expected to be in operation.

The Order will remain in force for a maximum period of 18 months from the date it comes into effect to permit the works and any associated contingencies including delays or phased delivery of the works.

The Order shall not apply to any persons lawfully engaged in connection with any works for which it is made, any member of the Police Force, Fire and Rescue Service, Ambulance Service, a vehicle being used by Special Forces during the execution of their duties or to any person acting with the permission or upon the direction of a Police Officer in uniform.

**Graeme Kane, Executive Director, Place and Sustainability, New Shire Hall,
Emery Crescent, Enterprise Campus, Alconbury Weald, Huntingdon, PE28 4YE**

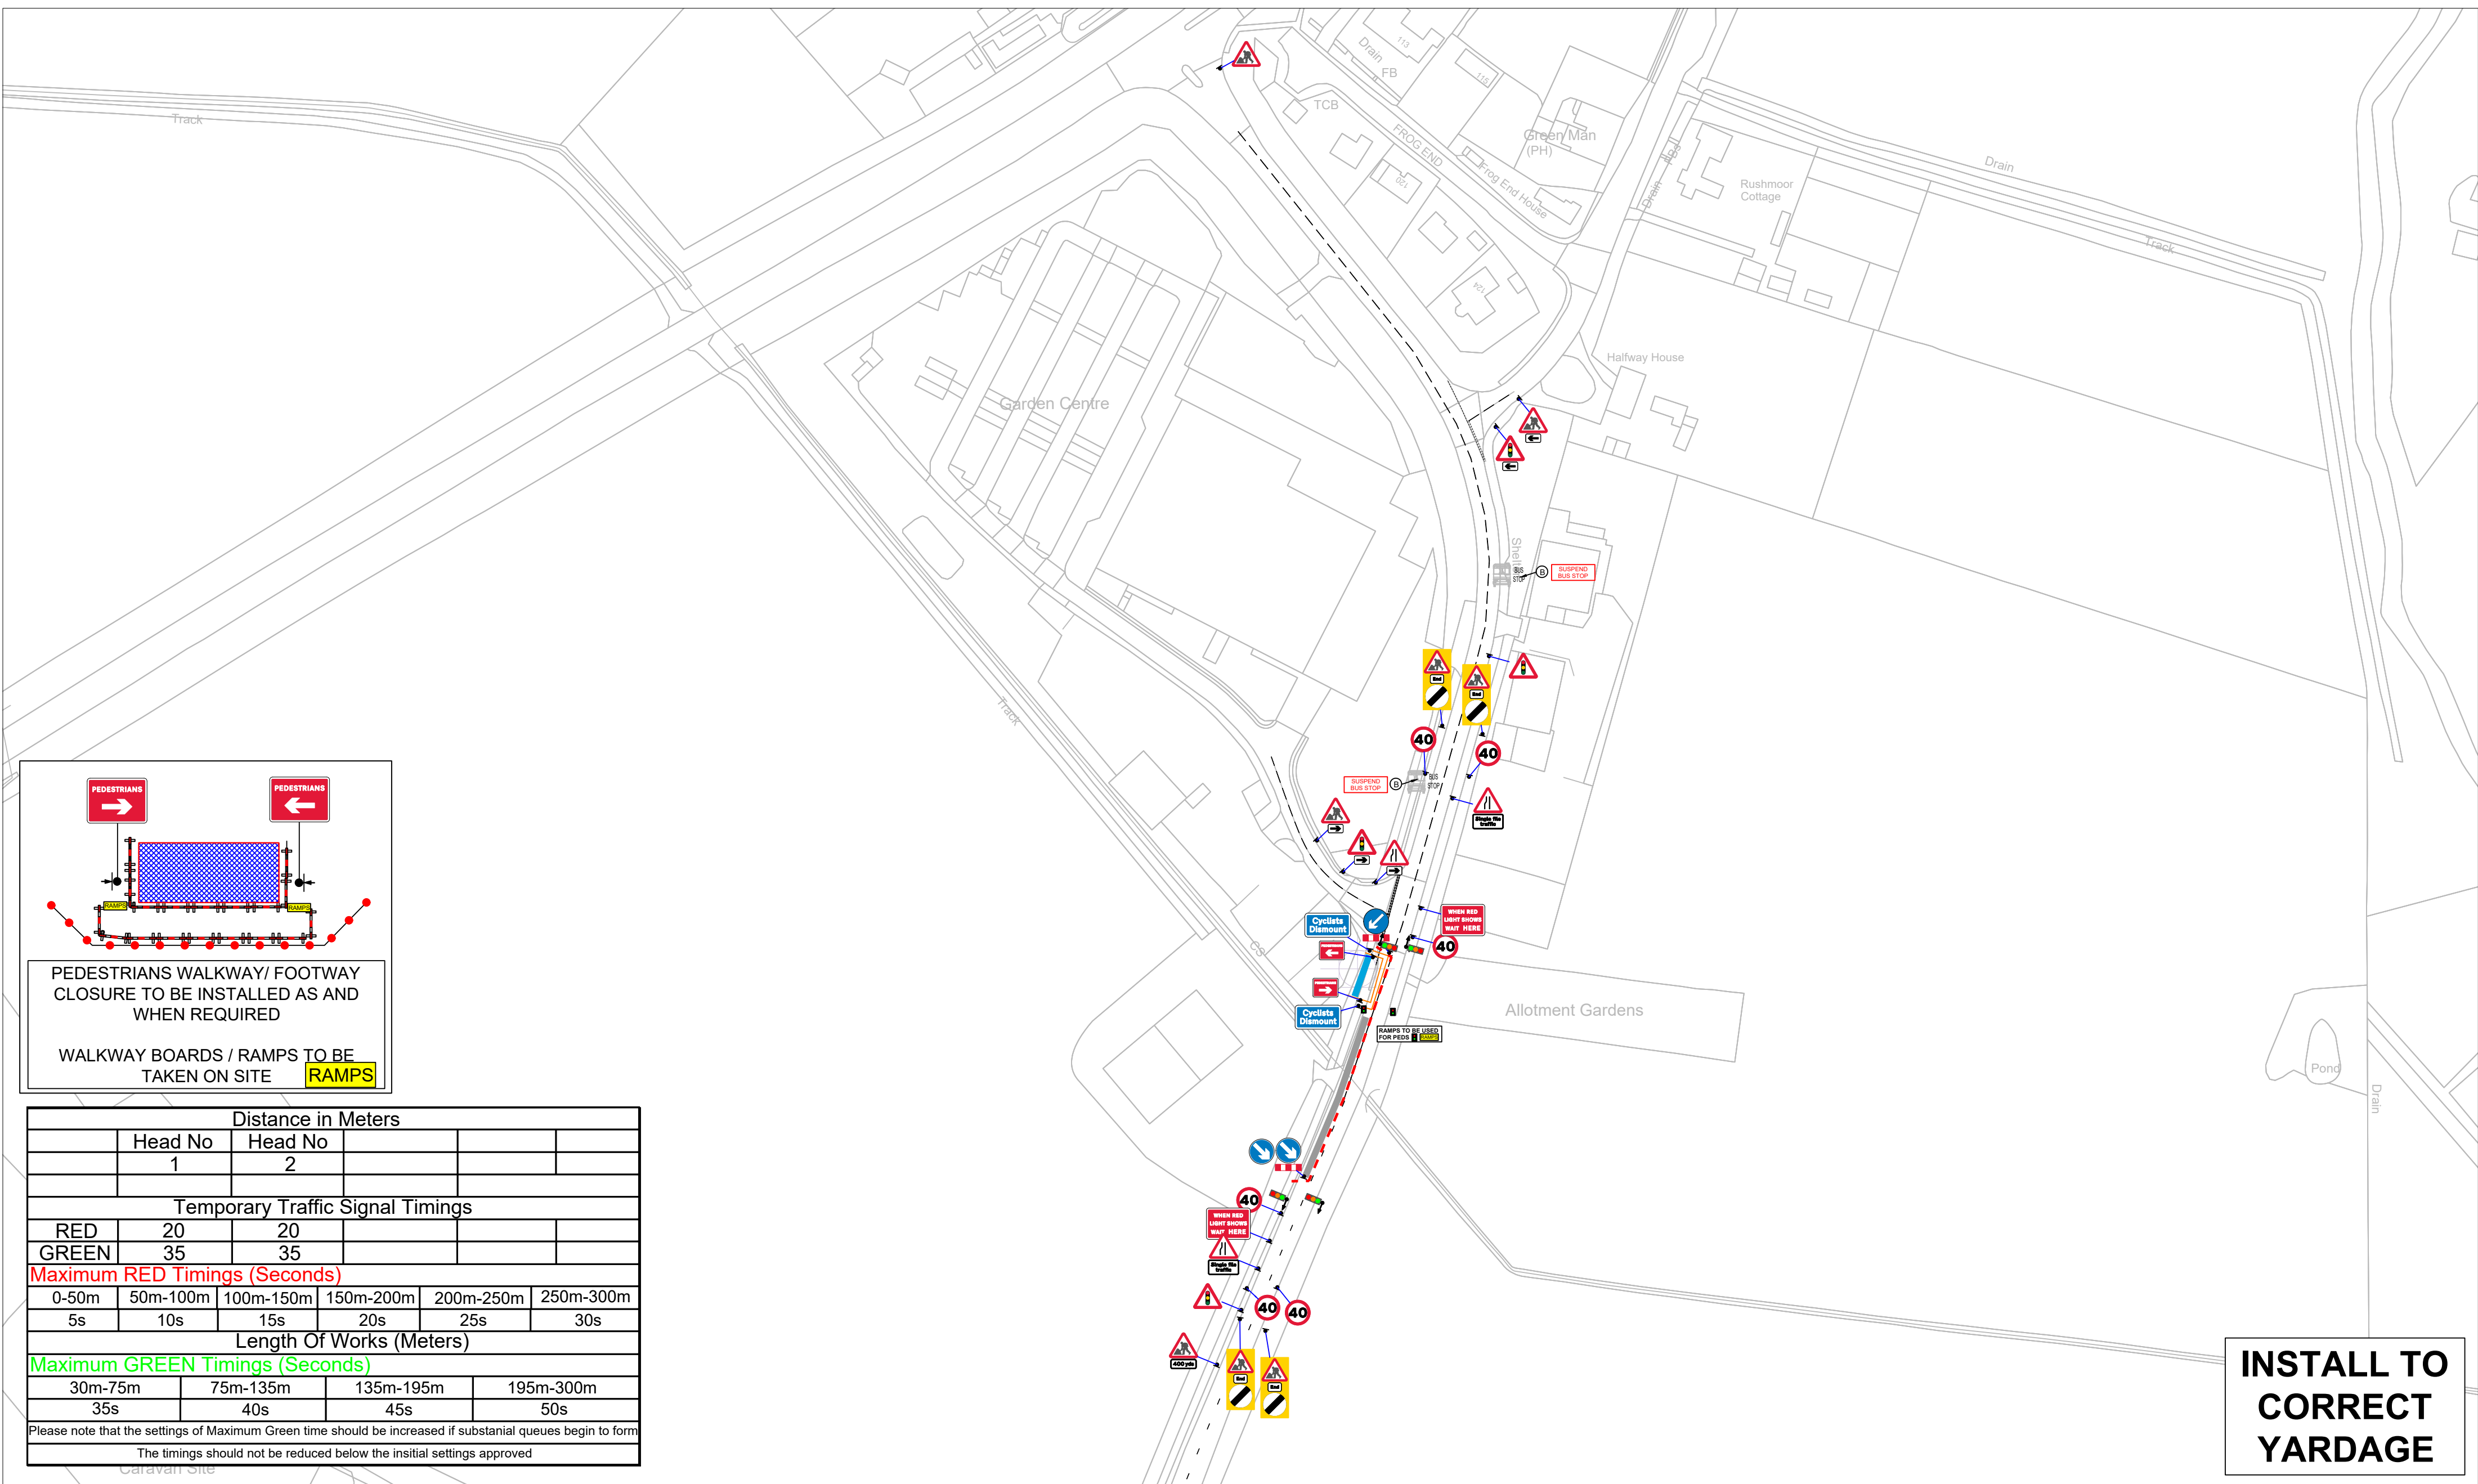

PEDESTRIANS WALKWAY/ FOOTWAY CLOSURE TO BE INSTALLED AS AND WHEN REQUIRED

WALKWAY BOARDS / RAMPS TO BE TAKEN ON SITE **RAMPS**

Distance in Meters					
	Head No	Head No			
	1	2			
Temporary Traffic Signal Timings					
RED	20	20			
GREEN	35	35			
Maximum RED Timings (Seconds)					
0-50m	50m-100m	100m-150m	150m-200m	200m-250m	250m-300m
5s	10s	15s	20s	25s	30s
Length Of Works (Meters)					
Maximum GREEN Timings (Seconds)					
30m-75m	75m-135m	135m-195m	195m-300m		
35s	40s	45s	50s		

Please note that the settings of Maximum Green time should be increased if substantial queues begin to form

The timings should not be reduced below the insitial settings approved

INSTALL TO CORRECT YARDAGE

Minimum **Sideways** safety zone 1.2M Min

Minimum **longways** safety zone 60M Min

(S)

(L)

FREE PARKING WILL REQUIRE N.P.C BEFORE WORKS START AS AND WHEN REQUIRED

No Parking Cones

Safety Zone

Traffic Cones

Pedestrian walkway


Client Work Area

Terraplas

Pedestrian Barriers

MAINTAIN RESIDENTS ACCESS AS REQUIRED AT ALL TIMES

RAMPS TO BE USED FOR PEDS AS REQUIRED **RAMPS**

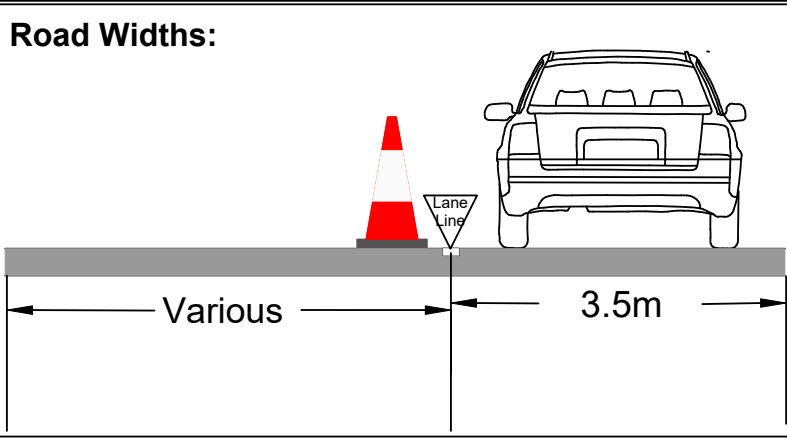

- NOTES:
1. All signs and cones to be in accordance with Chapter 8 **new roads and street works a code of practice (Red book)**
 - 2.Works access and egress are indicative, exactlocations to be agreed on site.
 - 3.Safety zones are to be installed as required as shown by the **SAFETY ZONE DIMENSIONS** BELOW
 4. All signs to be located so as not to obscure signs or objects and should be ballasted near to ground level using sand filled hessian bags or sign straps.
 5. All sign positions are indicative only and must be accurately positioned on site with good visibility and be clear of and obstructions or vegetation at all times.
 6. Drawing not to scale
 7. All Bus stop and parking bay suspensions to be determined by TM company and council liaison.

PH 01 TTL

RTM-DWG-6198 RTM 1354353
Cambridge Road Frog End Shepreth
South Cambridgeshire and
Peterborough SG8 6RB,
52.0979196,0.0359481

Traffic Management: -

TRAFFIC LIGHTS

Date Drawn: 29/07/2026

Drawn By: A.W

